


LumiGrid AURORA

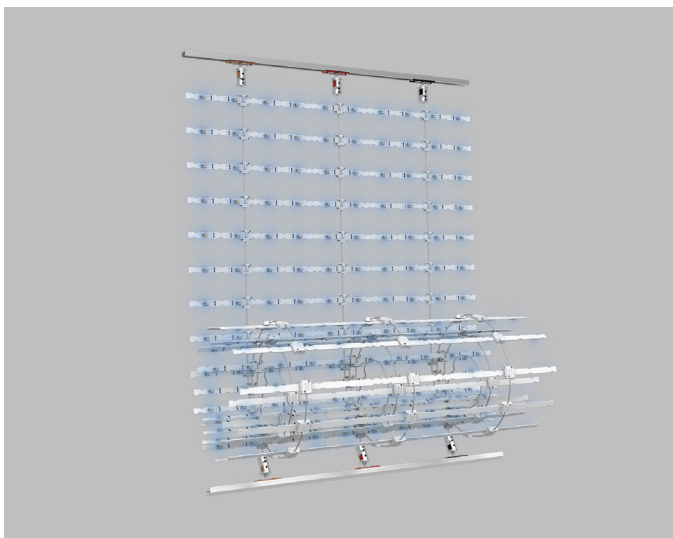

Spec by:

Agency:

Project Name:

Type of Project:

Notes:



IP22
RATED



ORDERING CODE

TLS	LG	AU						
	Product	Engine	Rating		Shape		Dimensions	
TLS	LumiGrid LG	Aurora AU	Indoor IN Outdoor OUT		Rectangle	RC	W x L	WxL
					Circle	CC	Dimensions	D
					Triangle	TR	L1xL2xL3	L1xL2xL3
					Hexagone	HX	Hexagone	HL
					Custom	CS		

Application		Mounting		CCT		Output*		Control	
Ceiling	CL	Recessed	RD	4000K	40K	Premium (746 lm/sqf)*	P	DMX by TLS	DMXT
Wall	WL	Surface	SF	6500K	65K	Standard (370 lm/sqf)*	S	DMX by others	DMXO
Other	OT					Custom output	CO		

*Lm/sqf are calculated at LED source.
Consult factory for output details

TECHNICAL SPECIFICATIONS

■ Lighting

Ingress protection	IP22 (indoor) IP65 (outdoor)
CRI	~ 90 (white LED)
LM80 *	> 150,000 hours
Operating temperature	-30 °C TO 80 °C


Note: *LM80 Test is only applicable to white pixels.

Warranty*	5-year limited warranty for LED
------------------	---------------------------------

* See warranty terms and conditions at www.tls-led.com/warranty


BOARD DIMENSION

Pitch 60 mm
Width 599 mm

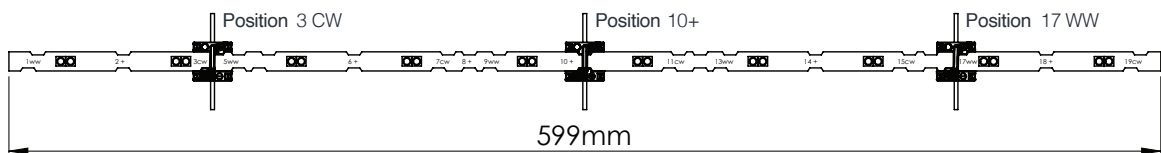


5/5
SEGMENTED BOARD

Pitch 60 mm
Width 479.5 mm

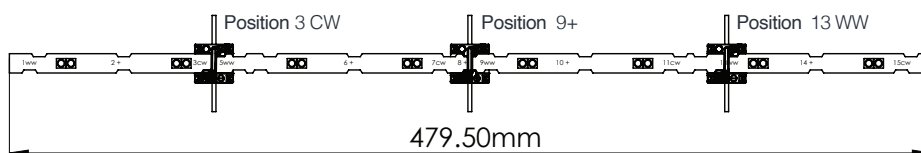


4/5
SEGMENTED BOARD

Pitch 60 mm
Width 359.5 mm

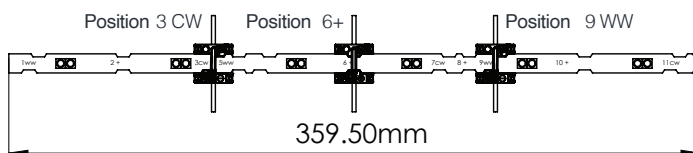


3/5
SEGMENTED BOARD

Pitch 60 mm
Width 239.5 mm

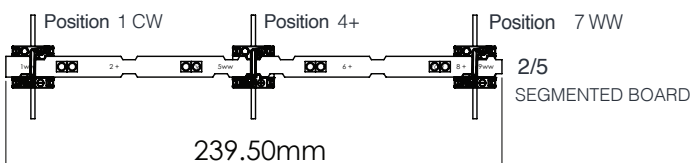


2/5
SEGMENTED BOARD

Pitch 60 mm
Width 119.5 mm




1/5
SEGMENTED BOARD

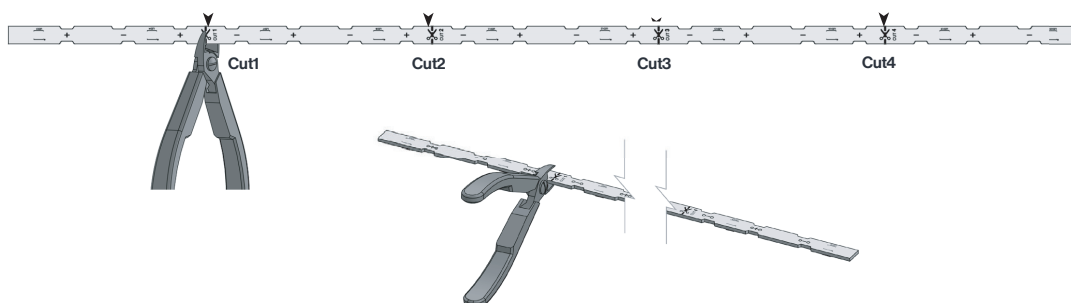


MOUNTING OPTIONS


Recessed ceiling (RD_CL)

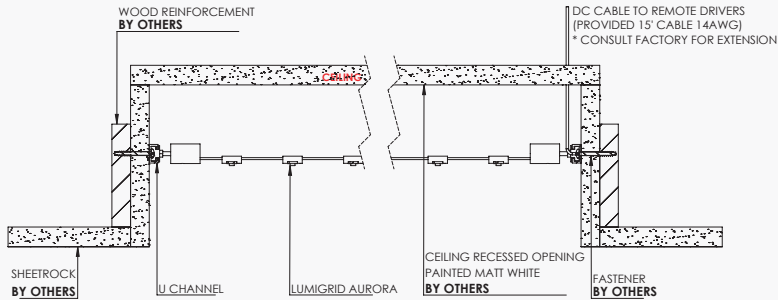


Surface ceiling (SF_CL)

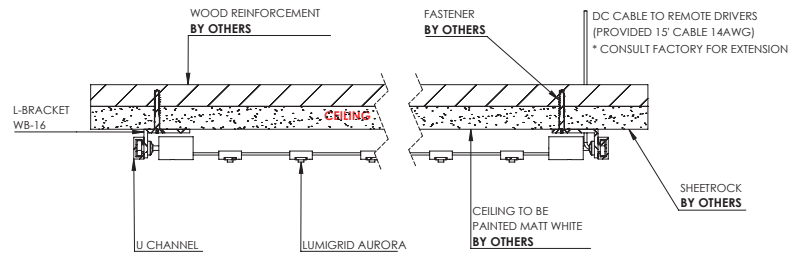

Recessed wall (RD_WL)

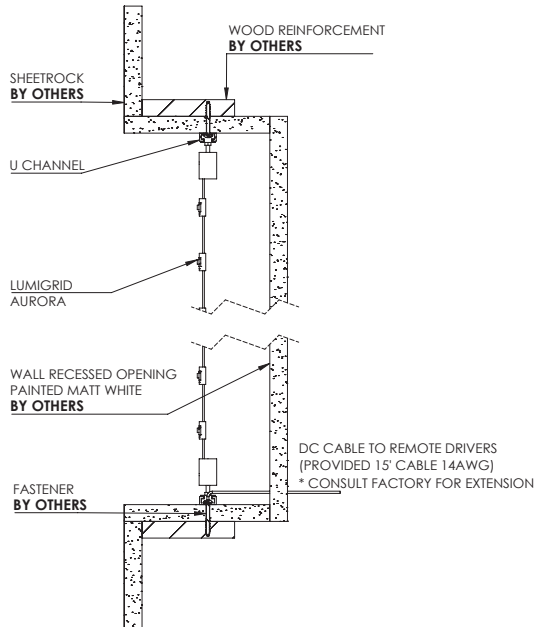


Surface wall (SF_WL)

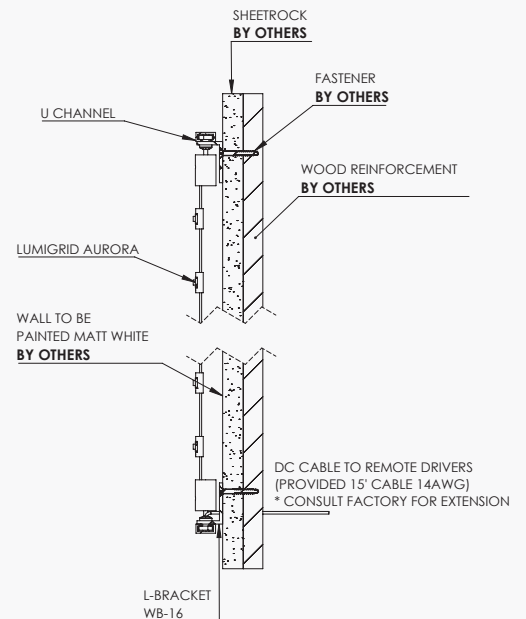

CONTROLS

■ DMX by TLS (DMXT)

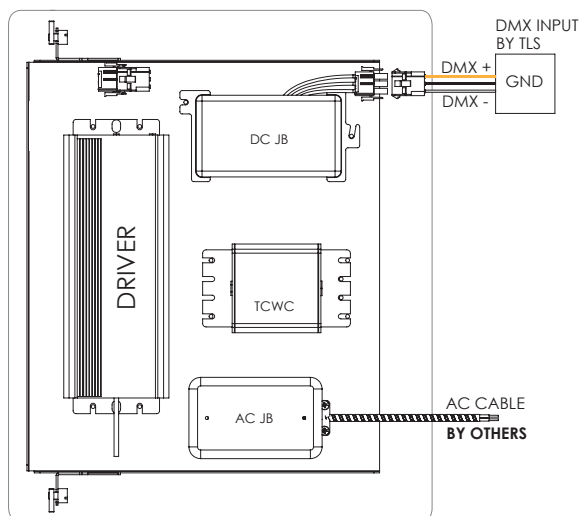

■ DMX by others (DMXO)

