


LumiGrid SOLA

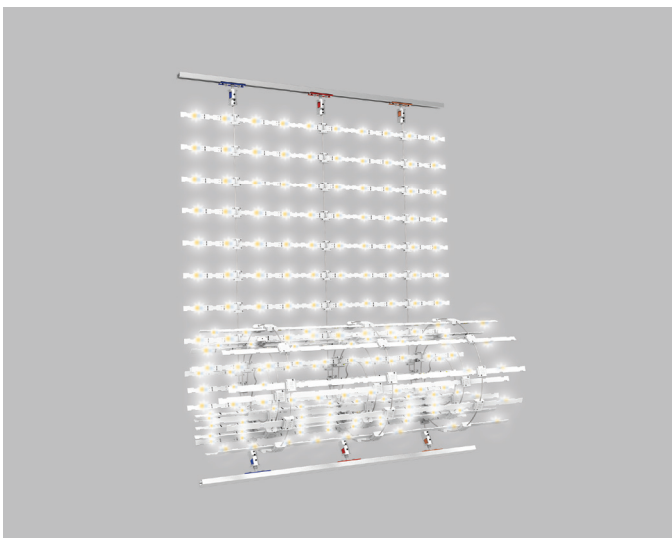

Spec by:

Agency:

Project Name:

Type of Project:

Notes:



IP22
RATED



ORDERING CODE

TLS	LG	SL	Rating		Shape		Dimensions	
	Product	Engine						
TLS	LumiGrid LG	Sola SL	Indoor IN Outdoor OUT		Rectangle	RC	W x L	WxL
					Circle	CC	Dimensions	D
					Triangle	TR	L1xL2xL3	L1xL2xL3
					Hexagone	HX	Hexagone	HL
					Custom	CS		

Application		Mounting		CCT		Output*		Control	
Ceiling	CL	Recessed	RD	2700-6500K	27K_65K	Premium (859 lm/sqf)*	P	0-10V	0/10
Wall	WL	Surface	SF	2700-4000K	27K_40K	Standard (425 lm/sqf)*	S	RF Remote	RM
Other	OT					Custom output	CO	Dali	DA
								DMX	DMX

*Lm/sqf are calculated at LED source.
Consult factory for output details

TECHNICAL SPECIFICATIONS

■ Lighting







Ingress protection	IP22 (indoor) IP65 (outdoor)
CRI	~ 90 (white LED)
LM80 *	> 150,000 hours
Operating temperature	-30 °C TO 80 °C

Note: *LM80 Test is only applicable to white pixels.

Warranty*	5-year limited warranty for LED
------------------	---------------------------------


* See warranty terms and conditions at www.tls-led.com/warranty

BOARD DIMENSION

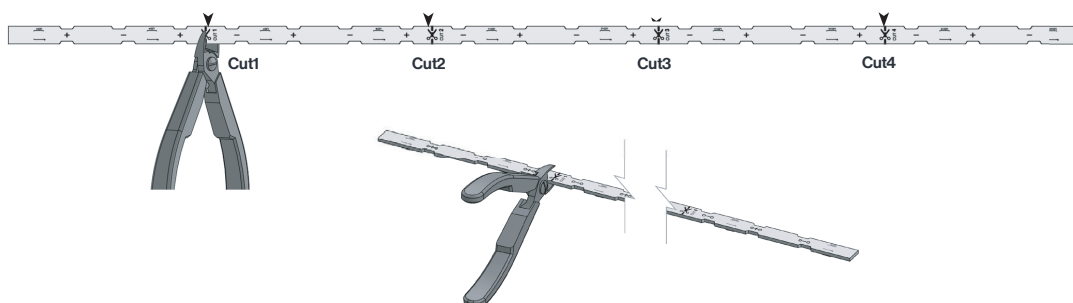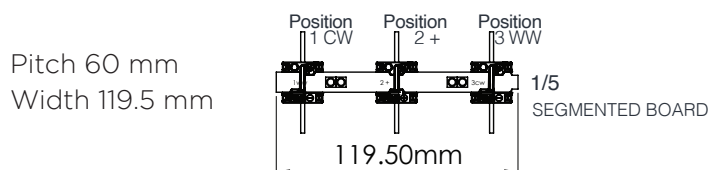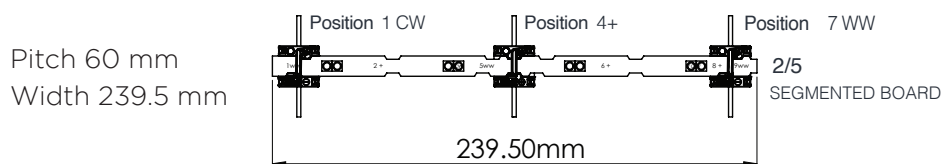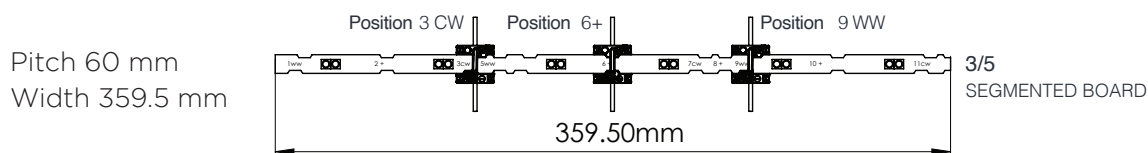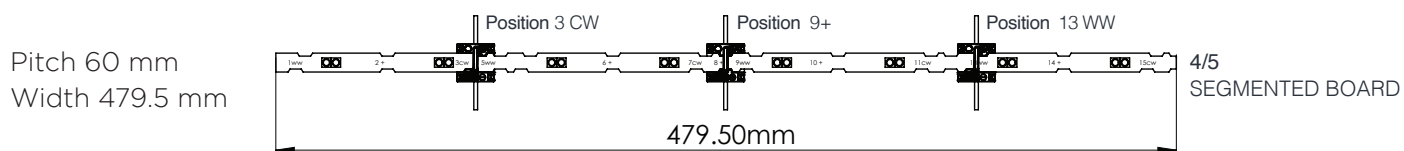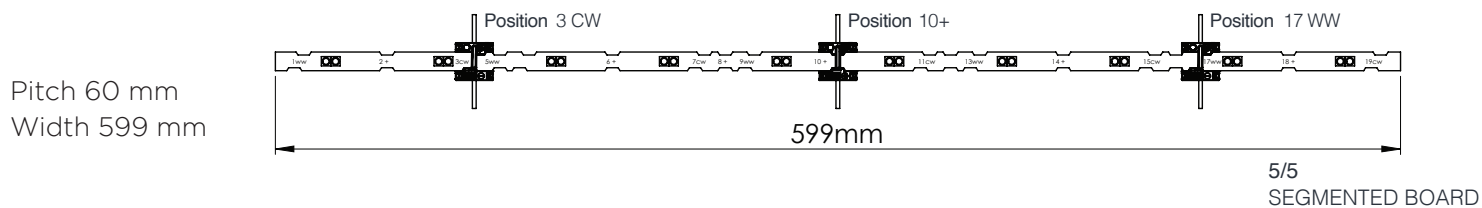


MOUNTING OPTIONS


Recessed ceiling (RD_CL)

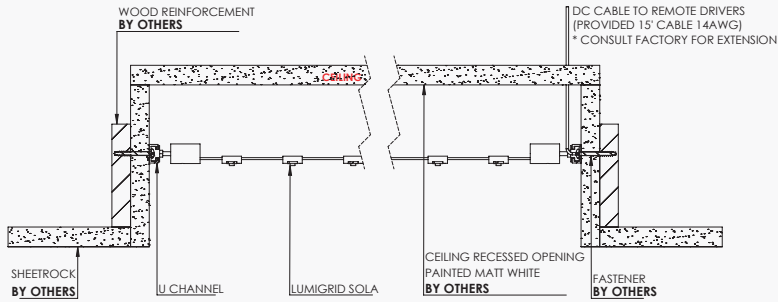


Surface ceiling (SF_CL)

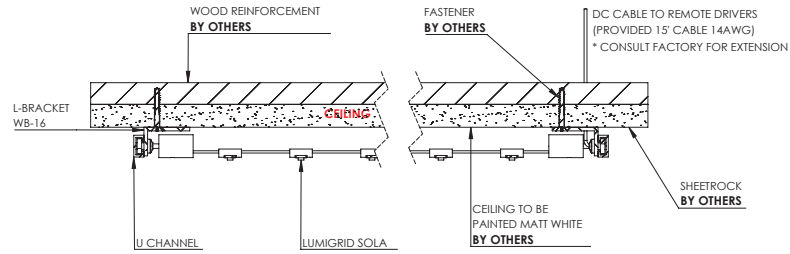

Recessed wall (RD_WL)

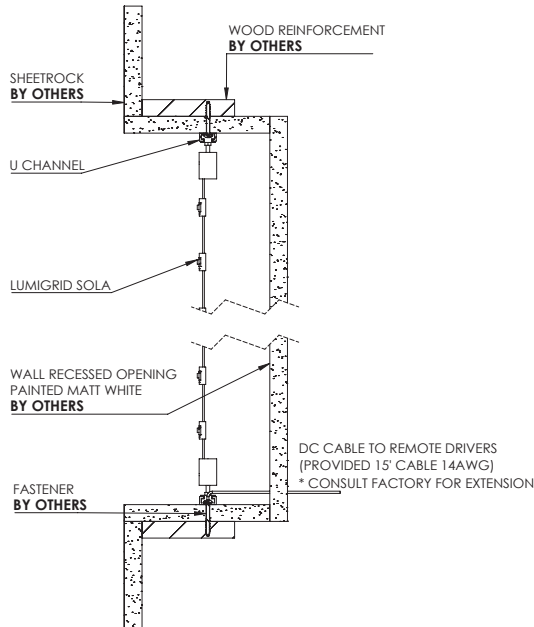


Surface wall (SF_WL)

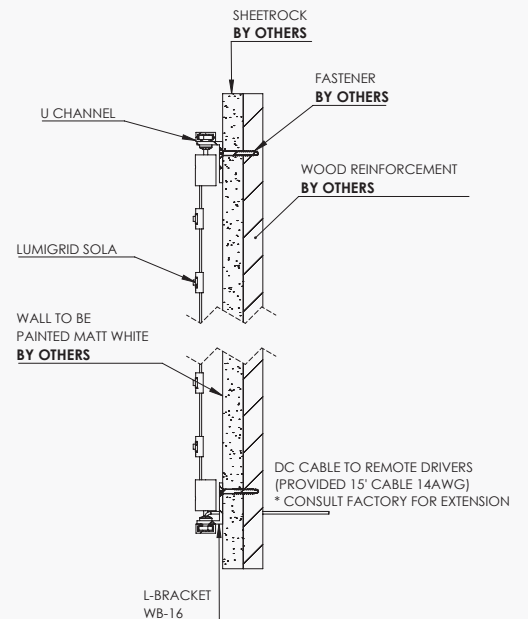


CONTROLS


■ 0-10V (0/10)

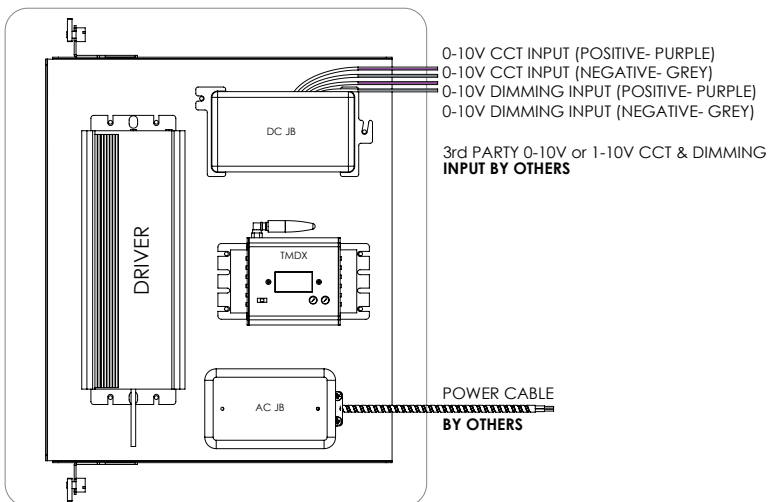

■ RF Remote (RM)

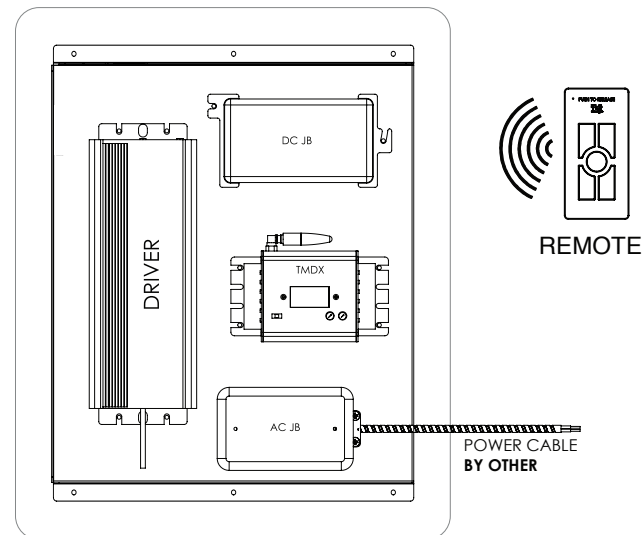

■ Dali (DA)

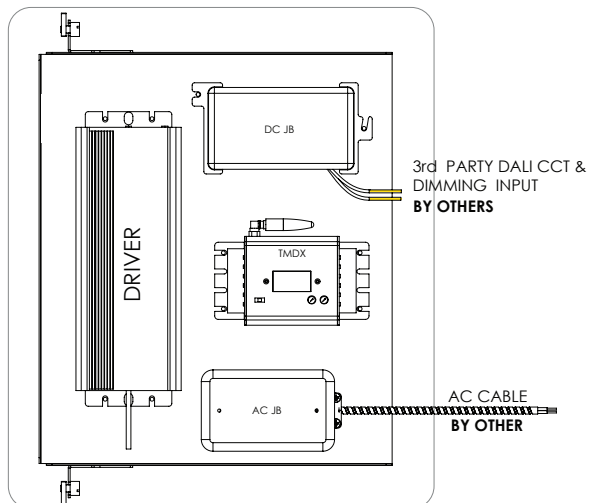

■ DMX (DMX)

