


LumiSky™ AURORA

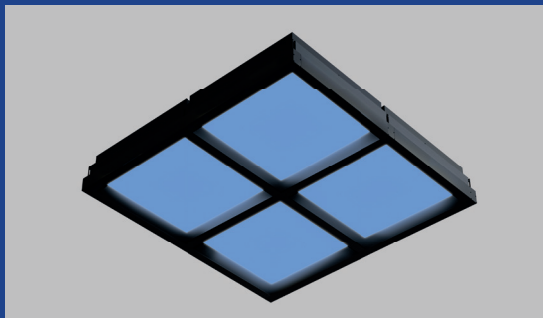

Spec by:

Agency:

Project Name:

Type of Project:

Notes:



IP22
RATED



LIGHTING PERFORMANCE*

	Output	Grid Configuration (2'x2' panel)**					
		1 x 1	2 x 1	2 x 2	2 x 3	3 x 3	5 x 10
Power consumption (Watts)	Premium	44W	88W	176W	264W	396W	2200W
Delivered output (Lumens)		2543 lm	5086 lm	10172 lm	15258 lm	22887 lm	127150 lm

* Power Consumption and Delivered output values are based on 6500K CCT

** See Configuration examples on page 5

ORDERING CODE

TLS	LS	AU												
	Product	Engine	Size	Nº panels horizontal				Nº panels vertical				Application	Mounting	
TLS	LumiSky LS	Aurora AU	2'x2' 2x2	1	1H	6	6H	1	1V	6	6V	Ceiling CL	Suspended Threaded Rods SPT	
				2	2H	7	7H	2	2V	7	7V		Suspended Aircraft cables SPA	
			2'x4' 2x4	3	3H	8	8H	3	3V	8	8V	Wall WL		Wall semi-recessed WL
				4	4H	9	9H	4	4V	9	9V			
				5	5H	10	10H	5	5V	10	10V			
				Custom CS				Custom CS						

Frame color	CCT	Output*	Control	Glass	Category	Option
Black BL	4000K 40K	Premium (688.8 lm/sqf)* P	DMX by TLS DMXT	Translucent TR	Nature NA	A A
White WH	6500K 65K		DMX by others DMXO	Printed PR	Space SC	B B
Silver NS					Landscape LD	C C
RAL RAL					Ocean OC	
					Custom Design CD	

* Lm/sqf are calculated at LED source

* See page 09

LIGHTING PERFORMANCE*

	Output	Grid Configuration (2'x4' panel)**					
		1 x 1	2 x 1	2 x 2	2 x 3	3 x 3	5 x 10
Power consumption (Watts)	Premium	88W	176W	352W	528W	792W	4440W
Delivered output (Lumens)		4542 lm	9084 lm	18168 lm	27253 lm	40879 lm	227160 lm

* Power Consumption and Delivered output values are based on 6500K CCT

** See Configuration examples on page 6

TECHNICAL SPECIFICATIONS

■ Diffuser

Glass	
Material	Glass
Fire classification	NFPA-701, B1, EN 13501-1, B-s1, d0
Transmission rate	62%

■ Frame color

Material	Aluminum			
Standard colors	Black 	White 	Silver 	RAL 

Note: Custom colors are available for LumiCloud Bespoke model

■ Lighting

Ingress protection	IP22 (indoor)
CRI	~ 90 (white LED)
LM80 *	> 150,000 hours
Operating temperature	-30 °C TO 80 °C



Note: *LM80 Test is only applicable to white pixels.

Warranty*	5-year limited warranty for LED
-----------	---------------------------------


* See warranty terms and conditions at www.tls-led.com/warranty

STRUCTURE


■ Size 2' x 2'

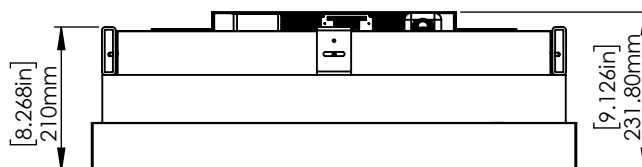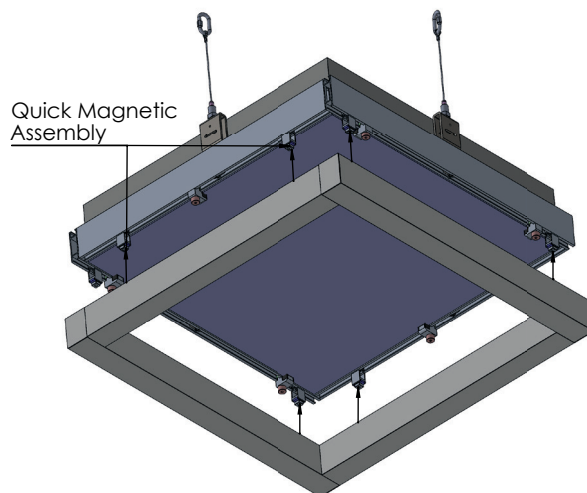

SIDE VIEW

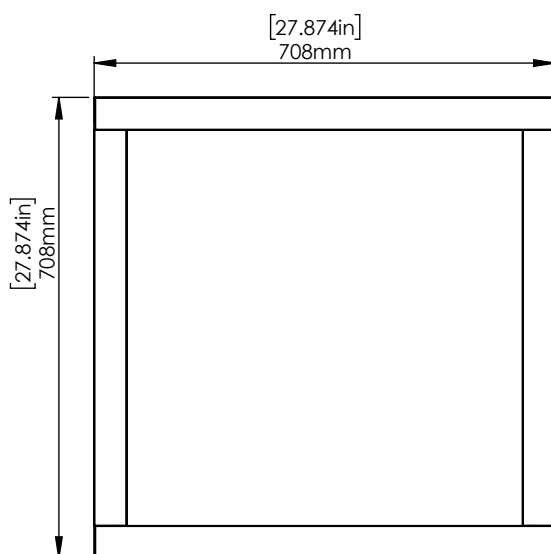

FRONT VIEW

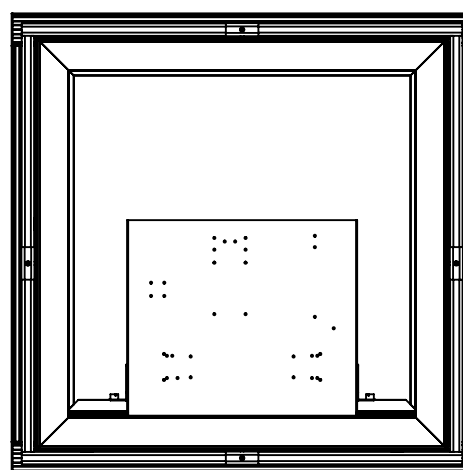

BACK VIEW


■ Weight Standard

Size	2'x2'
Kg	15.00
Lbs	33.06

Variations may occur but should not exceed indicated values.

STRUCTURE

■ Size 2' x 4'

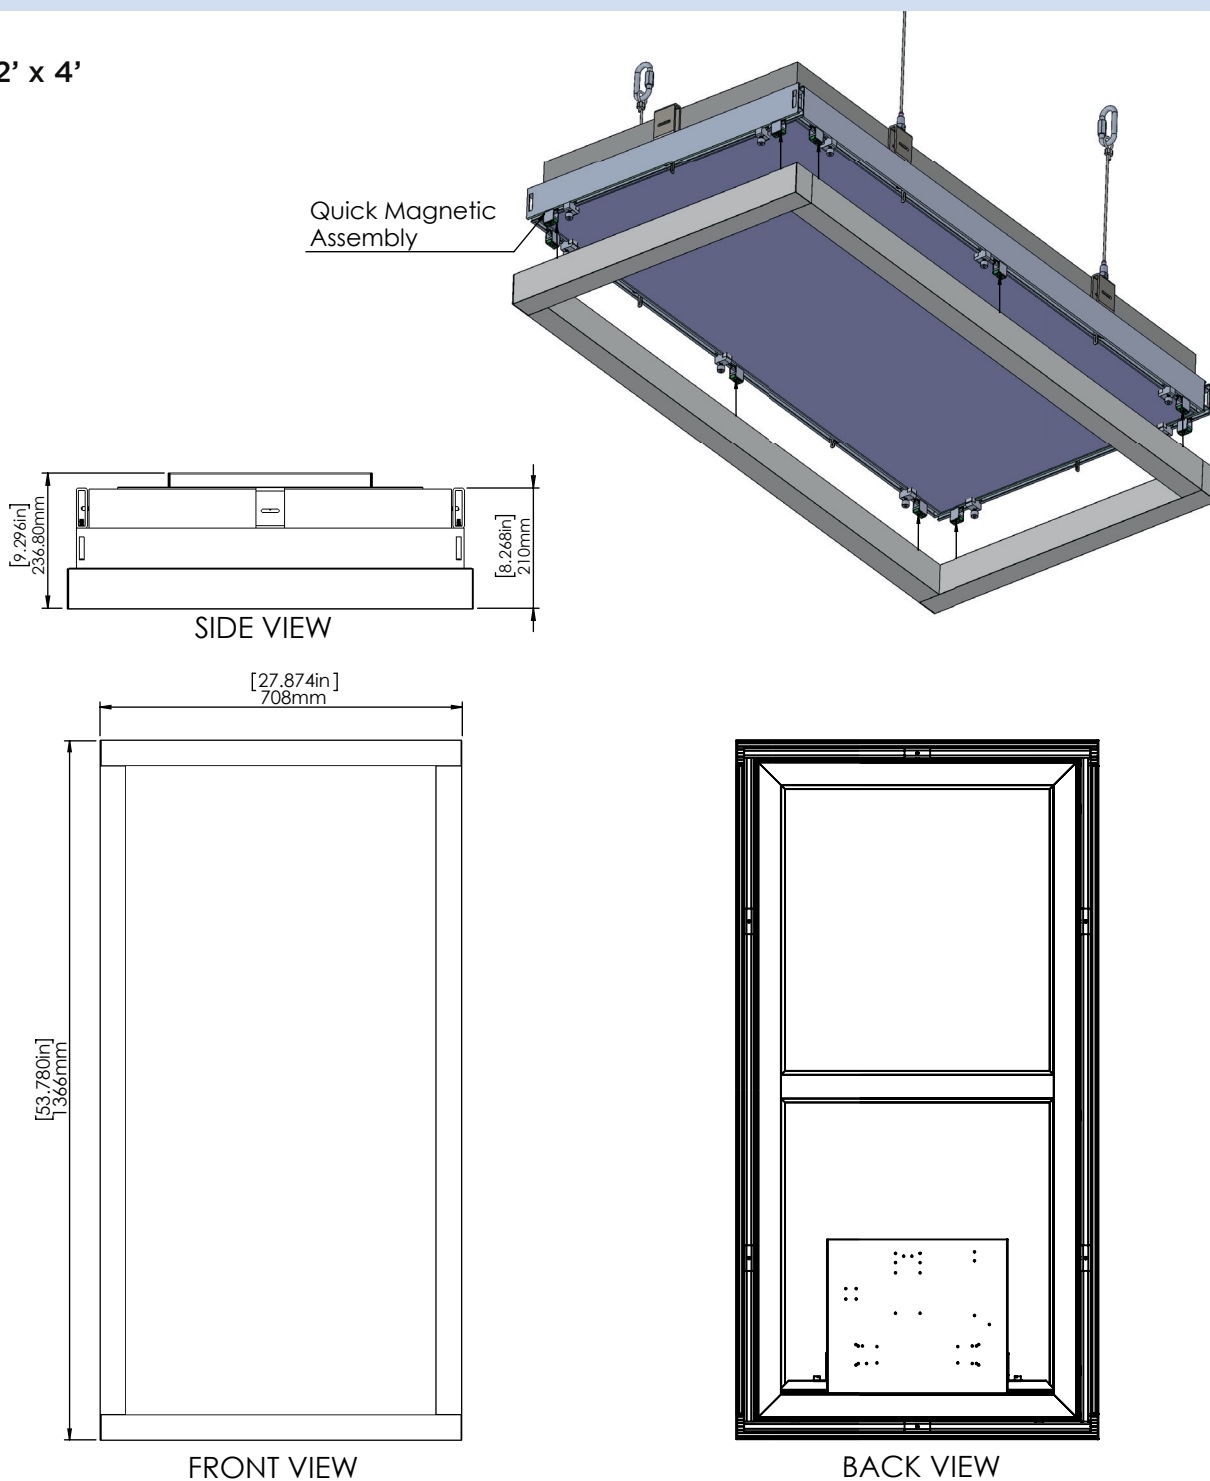







■ Weight Standard

Size	2'x4'
Kg	30.00
Lbs	66.12

Variations may occur but should not exceed indicated values.

CONFIGURATIONS







■ Size 2' x 2'

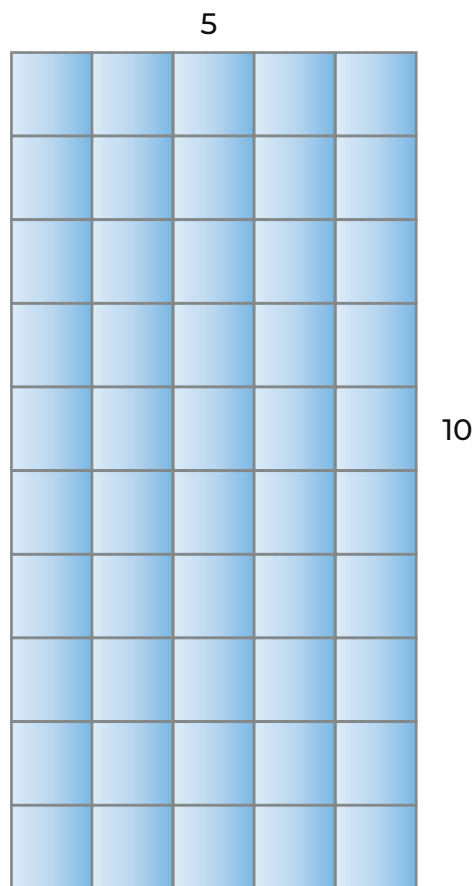

Custom configurations are also available upon request.

CONFIGURATIONS


■ Size 2' x 4'

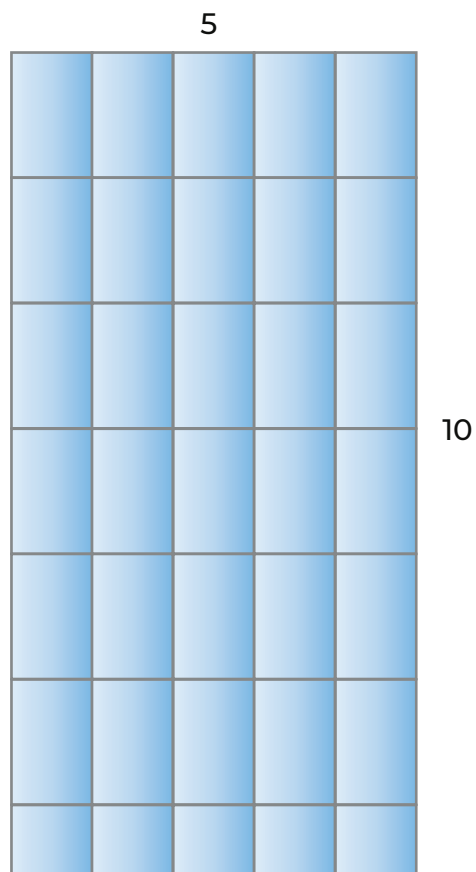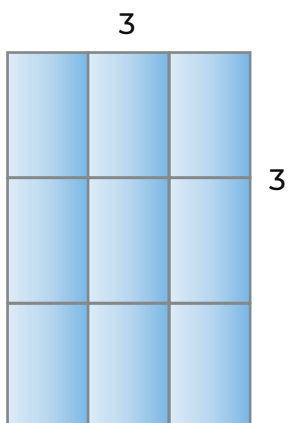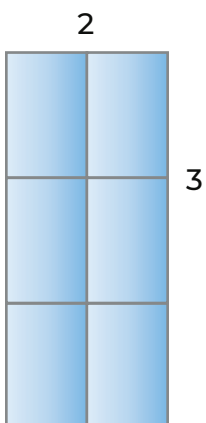


Custom configurations are also available upon request.

MOUNTING OPTIONS


■ Suspended with Aircraft Cables

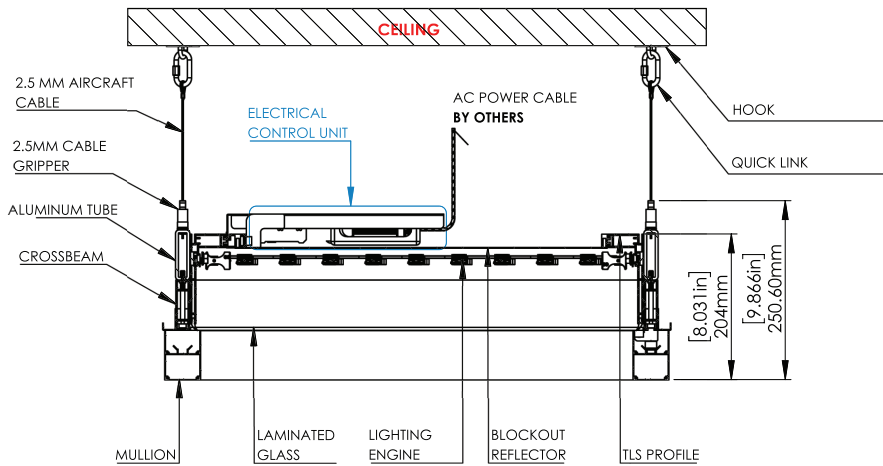


■ Suspended with Threaded Rods

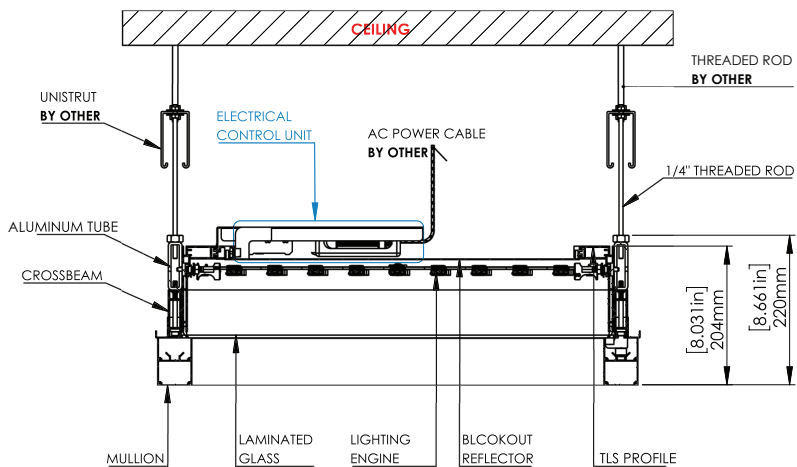

■ Wall recessed

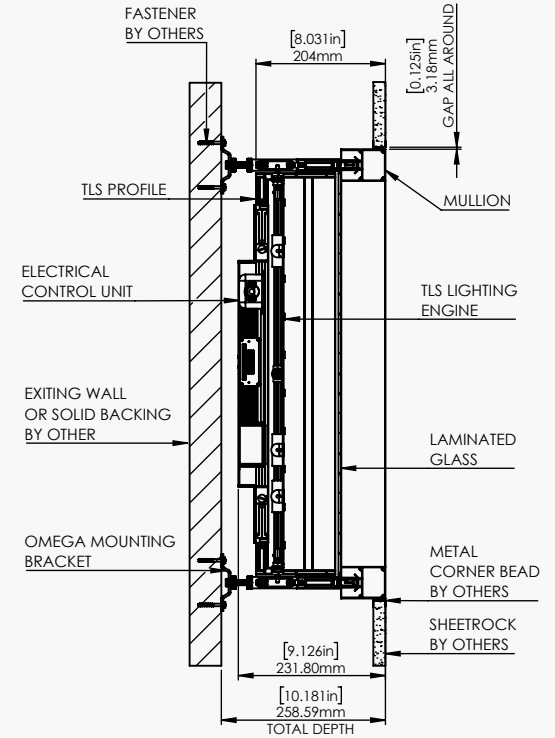


■ Wall semi-recessed

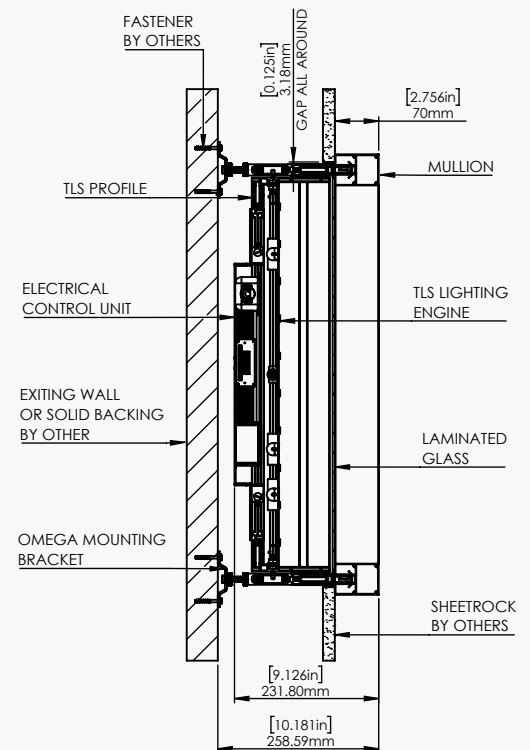


Note: Parts reference numbers are available upon request.

CONTROL

■ DMX by TLS (DMXT)

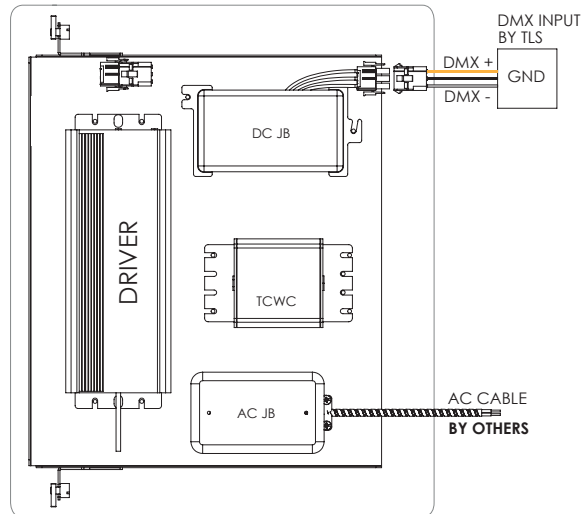

■ DMX by others (DMXO)

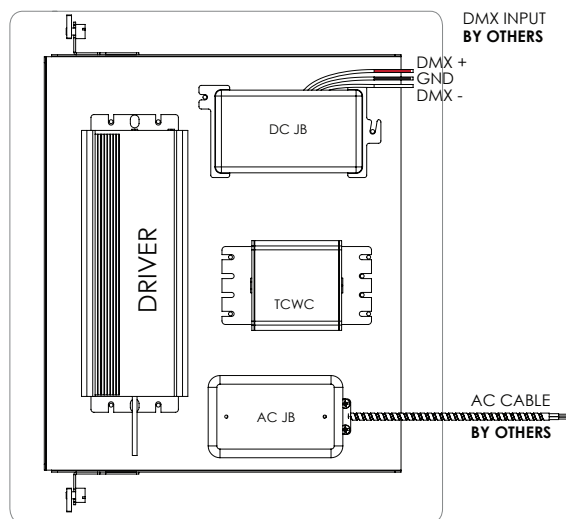

■ Electrical

Driver models	HLG-60-15A, HLG-100-15A, HLG-150-15A, HLG-240-15A, HLG-320-15A
Input voltage	90-305 V AC, 47-63 HZ
Output voltage	14-15 V DC

PRINT CATEGORY

2' x 2'

■ Nature



Example for popular configuration




Options




■ Space



Example for popular configuration

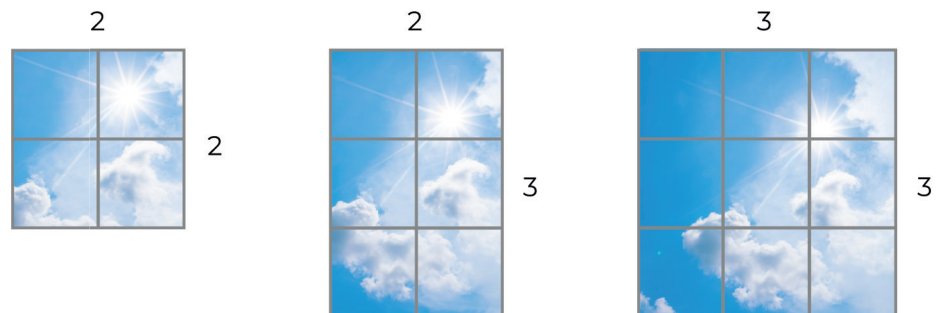

Options

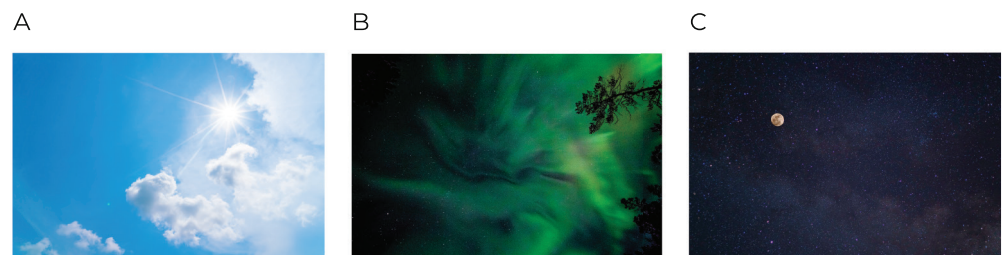


PRINT CATEGORY

2' x 2'

■ Landscape

Example for popular configuration





Options



■ Ocean

Example for popular configuration



Options



PRINT CATEGORY

2' x 4'

■ Nature

Example for popular configuration




Options




■ Space

Example for popular configuration

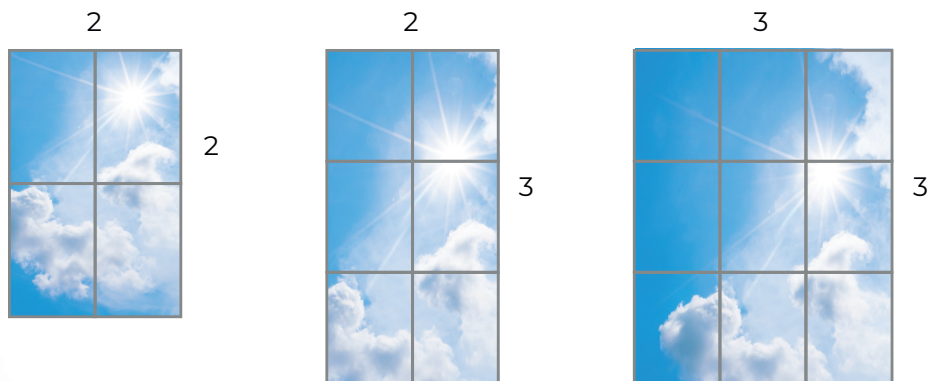

Options

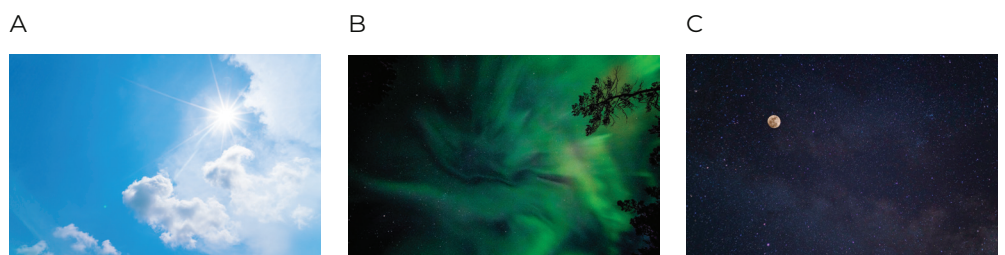

PRINT CATEGORY

2' x 4'

■ Landscape

Example for popular configuration






Options



■ Ocean

Example for popular configuration

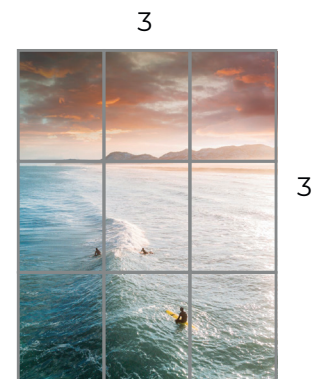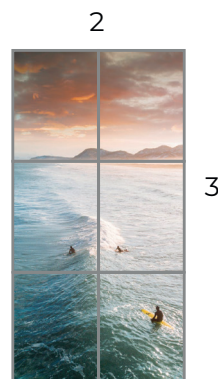

Options

